


# “Slot Seven” 7 mm Tunable Inductors

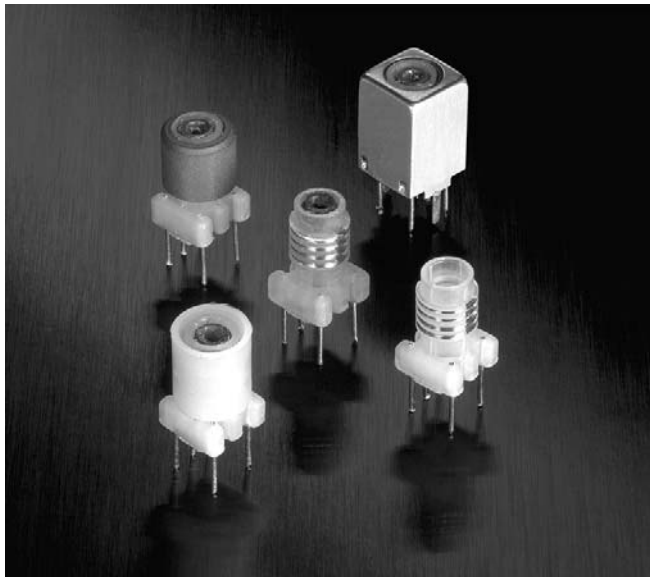

This product is not RoHS-compliant. Contact Coilcraft for current status or possible alternatives.


These versatile Coilcraft variable inductors operate over a wide range of frequencies. Standard inductance values are available from less than 100 nH to over 250  $\mu$ H. Custom values can also be provided upon request.

Coilcraft “Slot Seven” RF coils come in an international 7 mm package. Their precision-molded slotted bobbins ensure tight tolerances and high stability.



A variety of shielding options are offered. “Slot Seven” coils are tuned by means of slotted ferrite tuning cores for easy, positive adjustment. Use the Coilcraft Slot Tuner for a precise fit to the tuning slug.

Coilcraft **Designer’s Kit M106** contains 39 coils (3 each). To order, please contact Coilcraft or purchase on-line at <http://order.coilcraft.com>.

## Recommended Board Layout

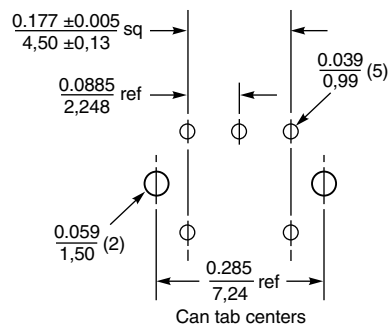


## Bottom View

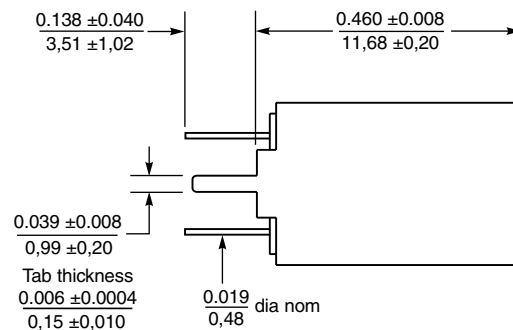

|               |            |               |
|---------------|------------|---------------|
| <b>Weight</b> | 7M2 series | 1.00 – 1.06 g |
|               | 7M3 series | 1.30 – 1.34 g |

## Schematic



## “SLOT TUNER” TUNING TOOL



Specially designed for this product series. SEE INDEX

**Coilcraft**<sup>®</sup>

Specifications subject to change without notice.  
Please check our website for latest information.

Document 112-1 Revised 02/16/05

1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469

E-mail [info@coilcraft.com](mailto:info@coilcraft.com) Web <http://www.coilcraft.com>


# “Slot Seven” 7 mm Tunable Inductors

## Series 7M2 — Shielded with Plastic Sleeve

| Part Number    | L min ( $\mu\text{H}$ ) | L nom ( $\mu\text{H}$ ) | L max ( $\mu\text{H}$ ) | Test frequency | Q min @ L nom | DCR max (Ohms) |
|----------------|-------------------------|-------------------------|-------------------------|----------------|---------------|----------------|
| <b>7M2-101</b> | 0.094                   | 0.100                   | 0.106                   | 25 MHz         | 27            | 0.124          |
| 7M2-121        | 0.113                   | 0.120                   | 0.127                   | 25 MHz         | 27            | 0.124          |
| <b>7M2-151</b> | 0.141                   | 0.150                   | 0.159                   | 25 MHz         | 30            | 0.151          |
| 7M2-181        | 0.169                   | 0.180                   | 0.191                   | 25 MHz         | 30            | 0.151          |
| <b>7M2-221</b> | 0.207                   | 0.220                   | 0.233                   | 25 MHz         | 35            | 0.176          |
| 7M2-271        | 0.254                   | 0.270                   | 0.286                   | 25 MHz         | 35            | 0.198          |
| <b>7M2-331</b> | 0.310                   | 0.330                   | 0.350                   | 25 MHz         | 40            | 0.248          |
| 7M2-391        | 0.367                   | 0.390                   | 0.413                   | 25 MHz         | 40            | 0.271          |
| <b>7M2-471</b> | 0.442                   | 0.470                   | 0.498                   | 25 MHz         | 40            | 0.291          |
| 7M2-561        | 0.526                   | 0.560                   | 0.594                   | 25 MHz         | 40            | 0.317          |
| <b>7M2-681</b> | 0.612                   | 0.680                   | 0.748                   | 25 MHz         | 40            | 0.333          |
| 7M2-821        | 0.738                   | 0.820                   | 0.902                   | 25 MHz         | 45            | 0.368          |
| <b>7M2-102</b> | 0.9                     | 1.0                     | 1.1                     | 25 MHz         | 45            | 0.396          |
| 7M2-122        | 1.1                     | 1.2                     | 1.3                     | 7.9 MHz        | 27            | 0.412          |
| <b>7M2-152</b> | 1.4                     | 1.5                     | 1.7                     | 7.9 MHz        | 27            | 0.466          |
| 7M2-182        | 1.6                     | 1.8                     | 2.0                     | 7.9 MHz        | 27            | 0.544          |
| <b>7M2-222</b> | 2.0                     | 2.2                     | 2.4                     | 7.6 MHz        | 27            | 0.595          |
| 7M2-272        | 2.4                     | 2.7                     | 3.0                     | 7.9 MHz        | 27            | 0.898          |
| <b>7M2-332</b> | 3.0                     | 3.3                     | 3.6                     | 7.9 MHz        | 27            | 1.04           |
| 7M2-392        | 3.5                     | 3.9                     | 4.3                     | 7.9 MHz        | 27            | 1.12           |
| <b>7M2-472</b> | 4.2                     | 4.7                     | 5.2                     | 7.9 MHz        | 27            | 1.38           |
| 7M2-562        | 5.0                     | 5.6                     | 6.2                     | 7.9 MHz        | 27            | 1.42           |
| <b>7M2-682</b> | 6.1                     | 6.8                     | 7.5                     | 7.9 MHz        | 27            | 1.49           |
| 7M2-822        | 7.4                     | 8.2                     | 9.0                     | 7.9 MHz        | 27            | 1.65           |
| <b>7M2-103</b> | 9.0                     | 10                      | 11                      | 7.9 MHz        | 27            | 2.42           |
| 7M2-123        | 10                      | 12                      | 14                      | 2.5 MHz        | 20            | 2.75           |
| <b>7M2-153</b> | 13                      | 15                      | 17                      | 2.5 MHz        | 20            | 3.71           |
| 7M2-183        | 15                      | 18                      | 21                      | 2.5 MHz        | 20            | 4.01           |
| <b>7M2-223</b> | 19                      | 22                      | 25                      | 2.5 MHz        | 20            | 7.37           |
| 7M2-273        | 23                      | 27                      | 31                      | 2.5 MHz        | 20            | 8.48           |
| <b>7M2-333</b> | 28                      | 33                      | 38                      | 2.5 MHz        | 20            | 13.34          |
| 7M2-393        | 33                      | 39                      | 45                      | 2.5 MHz        | 20            | 14.72          |
| <b>7M2-473</b> | 40                      | 47                      | 54                      | 2.5 MHz        | 20            | 16.42          |
| 7M2-563        | 48                      | 56                      | 64                      | 2.5 MHz        | 20            | 17.76          |
| <b>7M2-683</b> | 58                      | 68                      | 78                      | 2.5 MHz        | 20            | 19.76          |
| 7M2-823        | 70                      | 82                      | 94                      | 2.5 MHz        | 20            | 22.01          |
| <b>7M2-104</b> | 85                      | 100                     | 115                     | 2.5 MHz        | 20            | 24.25          |

Parts in bold are included in Coilcraft Designer's Kit M106.

## Typical Q at L nom — Series 7M2

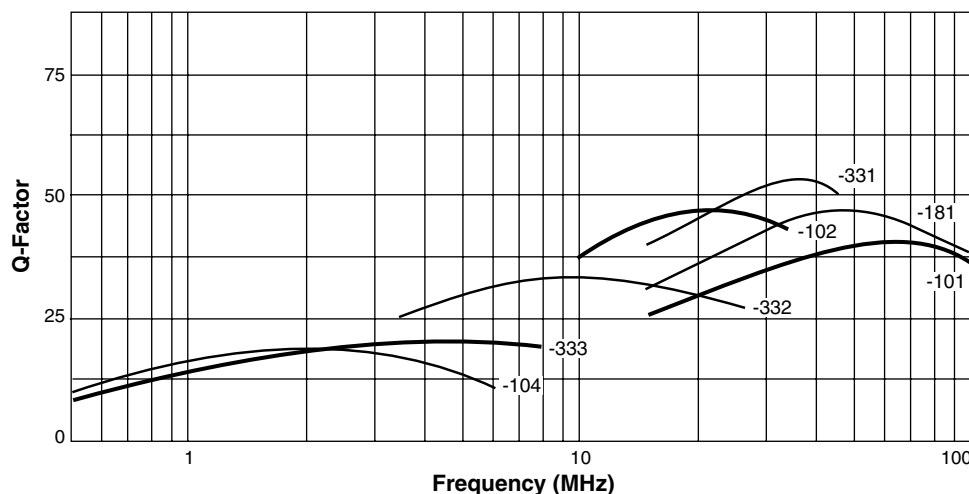

### Notes:

- All readings taken on Agilent/HP 4342-A Q Meter.
- L min is achieved at maximum extension of the core toward PC board. Complete tuning range is reached within the boundaries of the coil form.
- All specifications are at standard “Q” meter frequencies. L and Q readings change with frequency.
- Shielded parts have a sleeve insert to protect the winding.
- Operating temperature range -40°C to +85°C.
- Electrical specifications at 25°C.

**COILCRAFT** ACCURATE  
**PRECISION** REPEATABLE  
MEASUREMENTS  
SEE INDEX **TEST FIXTURES**

**Coilcraft**<sup>®</sup>

Specifications subject to change without notice.  
Please check our website for latest information.

Document 112-2 Revised 11/21/02

1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469

E-mail [info@coilcraft.com](mailto:info@coilcraft.com) Web <http://www.coilcraft.com>


# “Slot Seven” 7 mm Tunable Inductors

## Series 7M3 — Shielded with Ferrite Sleeve

| Part number    | L min ( $\mu\text{H}$ ) | L nom ( $\mu\text{H}$ ) | L max ( $\mu\text{H}$ ) | Test frequency | Q min @ L nom | DCR max (Ohms) |
|----------------|-------------------------|-------------------------|-------------------------|----------------|---------------|----------------|
| <b>7M3-151</b> | 0.128                   | 0.150                   | 0.173                   | 25 MHz         | 40            | 0.124          |
| 7M3-181        | 0.153                   | 0.180                   | 0.207                   | 25 MHz         | 45            | 0.124          |
| <b>7M3-221</b> | 0.187                   | 0.220                   | 0.253                   | 25 MHz         | 45            | 0.151          |
| 7M3-271        | 0.230                   | 0.270                   | 0.311                   | 25 MHz         | 50            | 0.151          |
| <b>7M3-331</b> | 0.281                   | 0.330                   | 0.380                   | 25 MHz         | 50            | 0.151          |
| 7M3-391        | 0.332                   | 0.390                   | 0.449                   | 25 MHz         | 55            | 0.176          |
| <b>7M3-471</b> | 0.400                   | 0.470                   | 0.541                   | 25 MHz         | 55            | 0.198          |
| 7M3-561        | 0.476                   | 0.560                   | 0.644                   | 25 MHz         | 60            | 0.198          |
| <b>7M3-681</b> | 0.544                   | 0.680                   | 0.816                   | 25 MHz         | 60            | 0.248          |
| 7M3-821        | 0.656                   | 0.820                   | 0.984                   | 25 MHz         | 60            | 0.271          |
| <b>7M3-102</b> | 0.8                     | 1.0                     | 1.2                     | 25 MHz         | 60            | 0.317          |
| 7M3-122        | 1.0                     | 1.2                     | 1.4                     | 7.9 MHz        | 45            | 0.333          |
| <b>7M3-152</b> | 1.2                     | 1.5                     | 1.8                     | 7.9 MHz        | 45            | 0.368          |
| 7M3-182        | 1.4                     | 1.8                     | 2.2                     | 7.9 MHz        | 45            | 0.396          |
| <b>7M3-222</b> | 1.8                     | 2.2                     | 2.6                     | 7.9 MHz        | 45            | 0.412          |
| 7M3-272        | 2.2                     | 2.7                     | 3.2                     | 7.9 MHz        | 45            | 0.466          |
| <b>7M3-332</b> | 2.6                     | 3.3                     | 4.0                     | 7.9 MHz        | 40            | 0.544          |
| 7M3-392        | 3.1                     | 3.9                     | 4.7                     | 7.9 MHz        | 40            | 0.595          |
| <b>7M3-472</b> | 3.8                     | 4.7                     | 5.6                     | 7.9 MHz        | 40            | 0.898          |
| 7M3-562        | 4.5                     | 5.6                     | 6.7                     | 7.9 MHz        | 40            | 1.04           |
| <b>7M3-682</b> | 5.4                     | 6.8                     | 8.2                     | 7.9 MHz        | 35            | 1.04           |
| 7M3-822        | 6.6                     | 8.2                     | 9.8                     | 7.9 MHz        | 35            | 1.12           |
| <b>7M3-103</b> | 8                       | 10                      | 12                      | 7.9 MHz        | 35            | 1.38           |
| 7M3-123        | 9                       | 12                      | 15                      | 2.5 MHz        | 35            | 1.49           |
| <b>7M3-153</b> | 11                      | 15                      | 19                      | 2.5 MHz        | 35            | 1.65           |
| 7M3-183        | 14                      | 18                      | 23                      | 2.5 MHz        | 35            | 2.42           |
| <b>7M3-223</b> | 17                      | 22                      | 28                      | 2.5 MHz        | 35            | 2.75           |
| 7M3-273        | 20                      | 27                      | 34                      | 2.5 MHz        | 40            | 3.71           |
| <b>7M3-333</b> | 25                      | 33                      | 41                      | 2.5 MHz        | 40            | 3.71           |
| 7M3-393        | 29                      | 39                      | 49                      | 2.5 MHz        | 40            | 4.01           |
| <b>7M3-473</b> | 35                      | 47                      | 59                      | 2.5 MHz        | 40            | 7.37           |
| 7M3-563        | 42                      | 56                      | 70                      | 2.5 MHz        | 40            | 8.48           |
| <b>7M3-683</b> | 51                      | 68                      | 85                      | 2.5 MHz        | 40            | 13.34          |
| 7M3-823        | 62                      | 82                      | 103                     | 2.5 MHz        | 40            | 14.72          |
| <b>7M3-104</b> | 75                      | 100                     | 125                     | 2.5 MHz        | 40            | 16.42          |
| 7M3-124        | 90                      | 120                     | 150                     | 2.5 MHz        | 40            | 17.76          |
| <b>7M3-154</b> | 113                     | 150                     | 188                     | 2.5 MHz        | 40            | 19.76          |
| 7M3-184        | 135                     | 180                     | 225                     | 2.5 MHz        | 40            | 22.01          |
| <b>7M3-224</b> | 165                     | 220                     | 275                     | 2.5 MHz        | 40            | 24.25          |

Parts in bold are included in Coilcraft Designer's Kit M106.

### Typical Q at L nom — Series 7M3

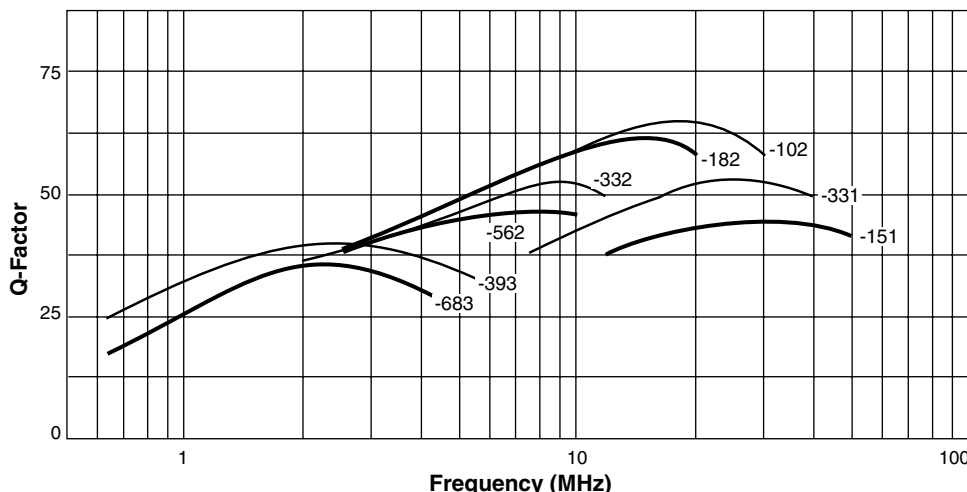

#### Notes:

- All readings taken on Agilent/HP 4342-A Q Meter.
- L min is achieved at maximum extension of the core toward PC board. Complete tuning range is reached within the boundaries of the coil form.
- All specifications are at standard “Q” meter frequencies. L and Q readings change with frequency.
- Shielded parts have a sleeve insert to protect the winding.
- Operating temperature range -40°C to +85°C.
- Electrical specifications at 25°C.

**COILCRAFT** ACCURATE  
**PRECISION** REPEATABLE  
MEASUREMENTS  
SEE INDEX **TEST FIXTURES**

**Coilcraft**<sup>®</sup>

Specifications subject to change without notice.  
Please check our website for latest information.

Document 112-3 Revised 11/21/02


1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469

E-mail [info@coilcraft.com](mailto:info@coilcraft.com) Web <http://www.coilcraft.com>

# “Slot Seven” 7 mm Tunable Inductors

## Typical Self Resonant Frequency

At nominal inductance

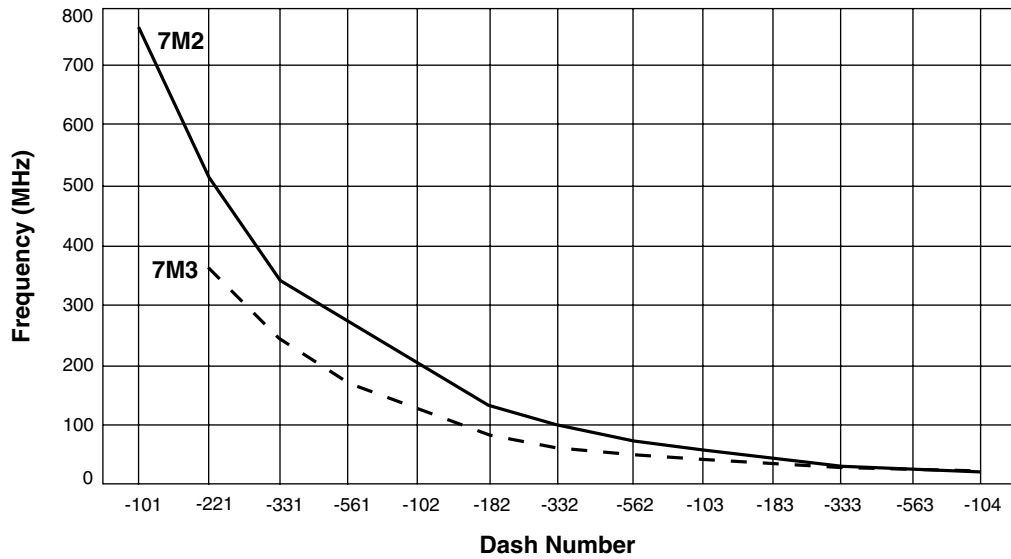

**Coilcraft**<sup>®</sup>

Specifications subject to change without notice.  
Please check our website for latest information.

Document 112-4 Revised 11/21/02

1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469

E-mail [info@coilcraft.com](mailto:info@coilcraft.com) Web <http://www.coilcraft.com>